

## E5251 User Guide



Data Rate: 3G DC-HSPA+/HSPA/UMTS

4G Bands: NA

3G Bands: 900/2100MHz

2G Bands: 850/900/1800/1900MHz

Wi-Fi: 2.4GHz, 802.11b/g/n

USB Cable: Micro USB cable included


Battery: 1150mAH removable

Web Browsing time: Up to 4 hours


Warranty: 12 Months

### APN Configuration:


1. Connect the Modem to a WiFi compatible device (laptop, tablet, smart phone)
2. Open up a web browser (Internet Explorer, Google Chrome, Safari, Etc.) and enter <http://192.168.1.1>

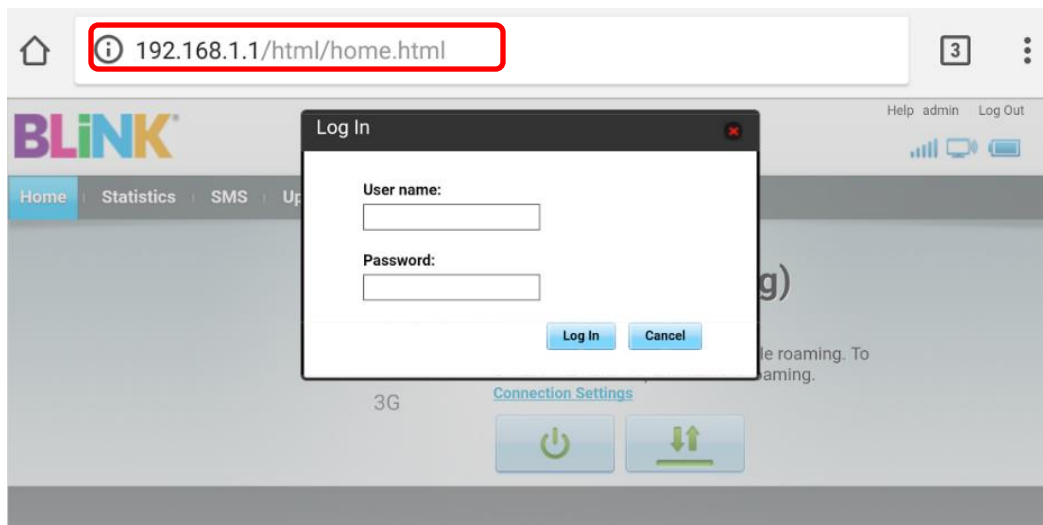


3. Enter the **username** and **password** to log in to the web management page
  - Username: **admin**
  - Password: **admin**

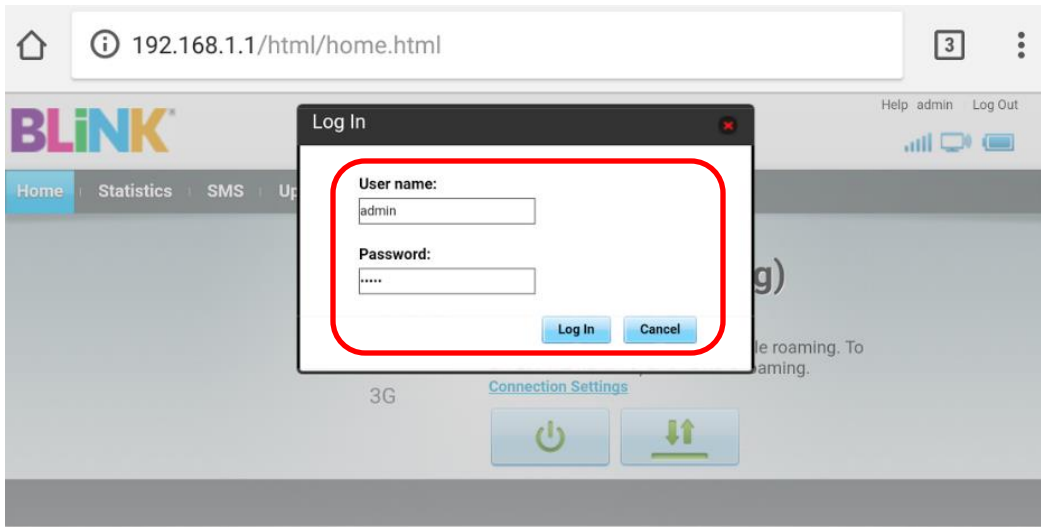


4. Click **Settings** and click **Dial Up** then Select **Profile Management**, then Click **New Profile**

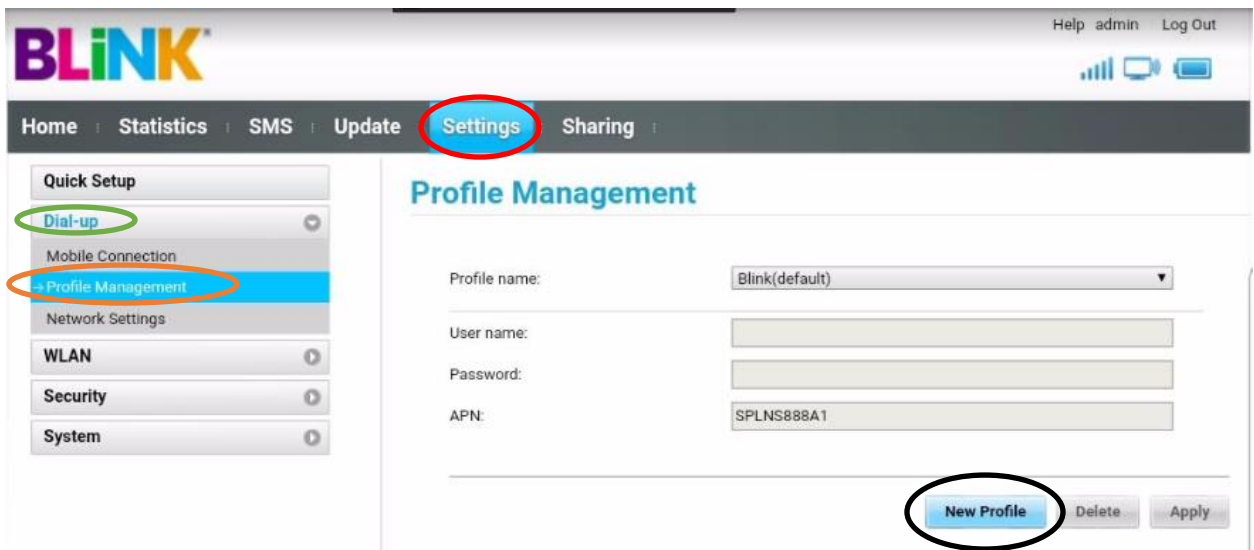

5. Configure the following, then click **SAVE**
  - a. Profile Name: **BLINK**
  - b. Authentication: **CHAP**
  - c. APN: **splns888a1**

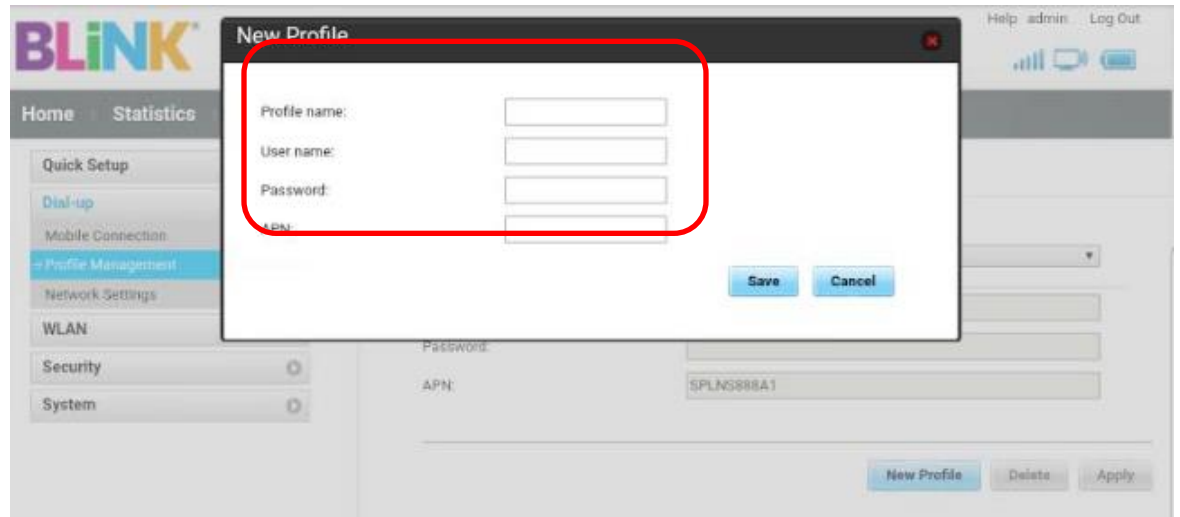

The screenshot shows the BLINK 'New Profile' dialog box. The 'Profile name' field is empty. The 'User name' and 'Password' fields are also empty. The 'APN' field is empty. The 'Save' and 'Cancel' buttons are visible at the bottom right of the dialog box. The background shows the BLINK interface with a sidebar menu and a main content area.

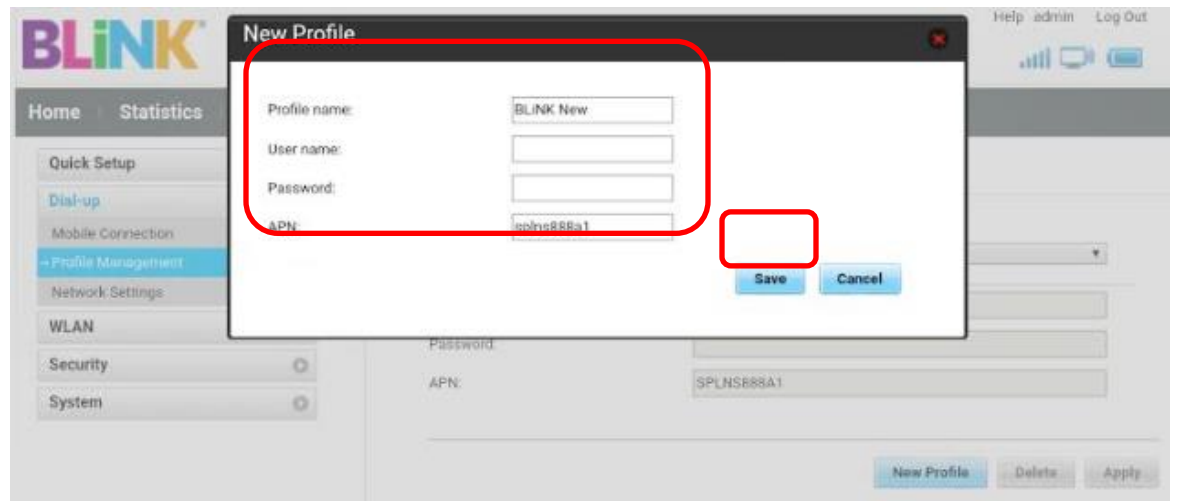

The screenshot shows the BLINK 'New Profile' dialog box. The 'Profile name' field contains the text 'BLINK New'. The 'User name' and 'Password' fields are empty. The 'APN' field contains the text 'splns888a1'. The 'Save' and 'Cancel' buttons are visible at the bottom right of the dialog box. The background shows the BLINK interface with a sidebar menu and a main content area.